3-5 Assy-Accessory Parts

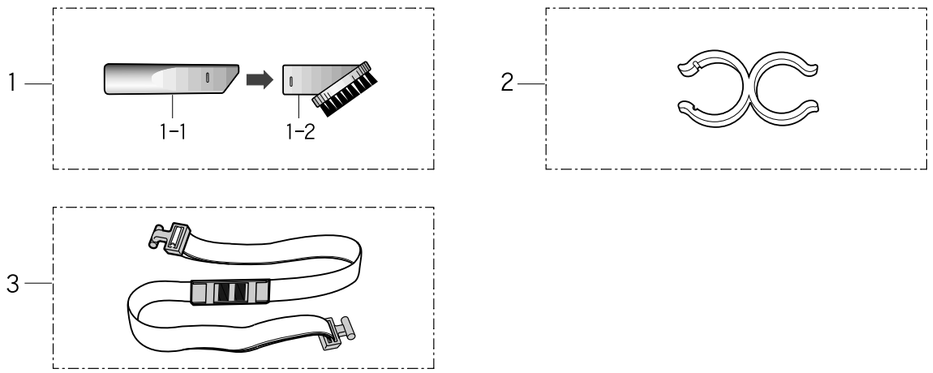

Location No.	Code No.	Description	Specification	Q'ty	Remarks
1	DJ67-60002B	BRUSH-DUSTING ASSY	ASSY, SUB GRY	1	●
1-1	DJ67-60114B	DUSTING-CREVICE	PP, SUB GRY	1	●
1-2	DJ67-00060A	DUSTING-BRUSH	PP, SUB GRY	1	●
2	DJ61-90123A	HANGER-ACCESSORY	PP, SUB GRY	1	●
3	DJ99-00016A	ASSY-BAND	POM+PVC+PP	1	●

4. PCB Diagrams

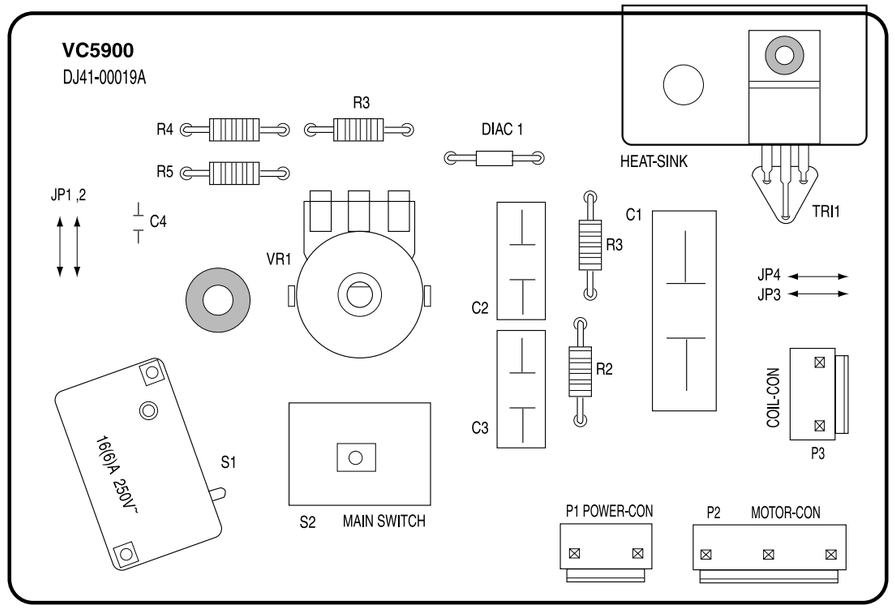

⦿ PBA-MAIN

PART LIST

Loc No.	SPEC	CODE NO.	VC-5915V	VC-5913V,5914V	VC-5913,5914
R1	R-CARBON(S) ; 470Kohm, 5%, 1/2W, AA, TP, 2.4x6.4㎜	2001-001150	O	O	O
R2	R-CARBON(S) ; 470Kohm, 5%, 1/2W, AA, TP, 2.4x6.4㎜	2001-001150	O	O	O
R3	R-CARBON ; 10ohm, 5%, 1/4W, AA, TP, 2.4x6.4㎜	2001-000110	O	O	
R4	R-CARBON(S) ; 5.6Kohm, 5%, 1/2W, AA, TP, 2.4x6.4㎜	2001-001155	O	O	
R5	R-CARBON(S) ; 390Kohm, 5%, 1/2W, AA, TP, 2.4x6.4㎜	2001-001137	O	O	
VR1	VR-ROTARI ; 500Kohm,1/5W, TOP	2101-001091	O	O	
C1	C-FILM, MPPF ; 330nF, 10%, 275V, TP, 26x10x1519.5, 22.5	2306-001033	O	O	O
C2					
C3					
C4	C-MYLAR ; 100nF, 100V, 3.5%	2301-000010	O	O	
DIA1	THYRISTOR DIAC ; 40V, HT1162, TECCOR	1401-000128	O	O	
TRI1	THYRICTOR-TRIAC ; BTA16-600BW, 16A, 600V, THOMSON	1401-001027	O	O	
JP1, 2	WIRE-NO SHEATH CU ; TCWA, 300V, 52㎜(TAPING), 1/0.6㎜	3812-000219			O
JP3, 4	WIRE-NO SHEATH CU ; TCWA, 300V, 52㎜(TAPING), 1/0.6㎜	3812-000219		O	
SW1	SWITCH-MICRO ; 10(8)A 250V~, T85, SAIA	3403-	O		
SW2	SWITCH-PUSH ; 250V/8A, SPST, L5.01.09 SIGNAL LUX	3403-000317	O	O	O
P1	CONNECTOR-HEADER ; 1WALL, 3P, ANGLE, WHT, 396-03AVT	3711-002845	O	O	O
P2	CONNECTOR-HEADER ; 1WALL, 5P, STRAIGHT, WHT, 396-05AVT	3711-000262	O	O	O
P3	CONNECTOR-HEADER ; 1WALL, 3P, STRAIGHT, RED, 396-03AVT	3711-003618	O		
HEAT-SINK	HEAT SINK ; VC9000, 1.5T, AL	DJ62-30113A	O	O	
RIVET-PH	RIVET-PH ; D3.2, L8.44, - , A5056BE-H32	6041-000213	O	O	
PCB-MAIN	PCB ; VC-5900, FR-1, 1.6T, 115x62	DJ41-00019A	O	O	O